


Scale:  
1 unit on this drawing =  
9.1429 in reality

Notes:

- 1- The fixed parts of the bridge are held by a frame that is not shown on this drawing to ease understanding of the mechanism of the bridge.
- 2- The crankshaft is held by bearings at both side and is coupled to a bike gear that we used to deliver power to the flywheel.
- 3- In order to deliver the power from the crankshaft to the flywheel we used a chain but we could have used any other well known mechanical device.
- 4- I built a prototype of this size just to prove that it is possible to generate a rotation with the linear movement of things. In other words, for true applications on roads or at airports or anywhere else, the size and particularities of the prototype have to be recalculated.
- 5- This prototype is for very slow speed applications ( and ideally, we can activate it with our hands also ) and has been designed only to prove that it is possible to create a rotation with linear movement.
- 6- This prototype has been designed with a 4 cylinder crankshaft but we could have used anything else. It all depends on the application but the principle stays the same

Figure 3  
Application # 10/711662  
For: USPTO, By: Alain Painchaud  
Member 109834 of OIQ, Quebec

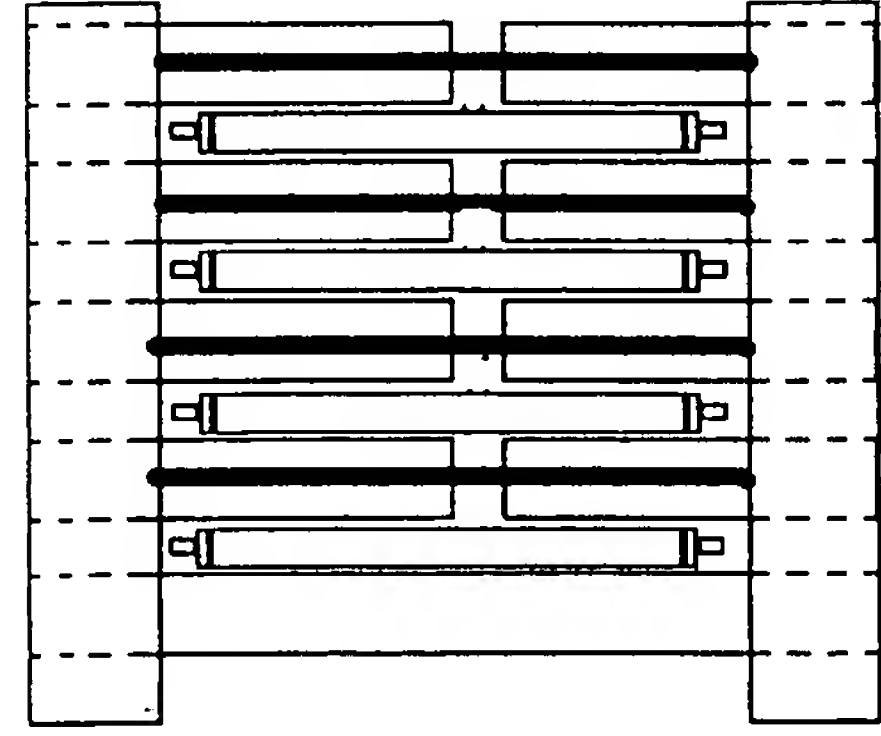

Cut to only show the  
top view of invention


Scale:  
1 unit on this drawing =  
9.1429 in reality

Frame of the bridge with the moving parts in the middle

#### Notes:

- 1- The moving parts are guided in the middle by a guide and at extremities with rollers.
- 2- This is only a prototype and it is not intended for permanent generation of energy.
- 3- The road segments have not been designed for winter conditions but only to prove that it is possible to convert a linear movement into a rotation and ultimately into electrical energy.


Figure 4  
Top view of the invention  
Application # 10/71662  
For USPTO, By: Alain Painchaud  
Member of OIQ in Quebec, Canada. #109834

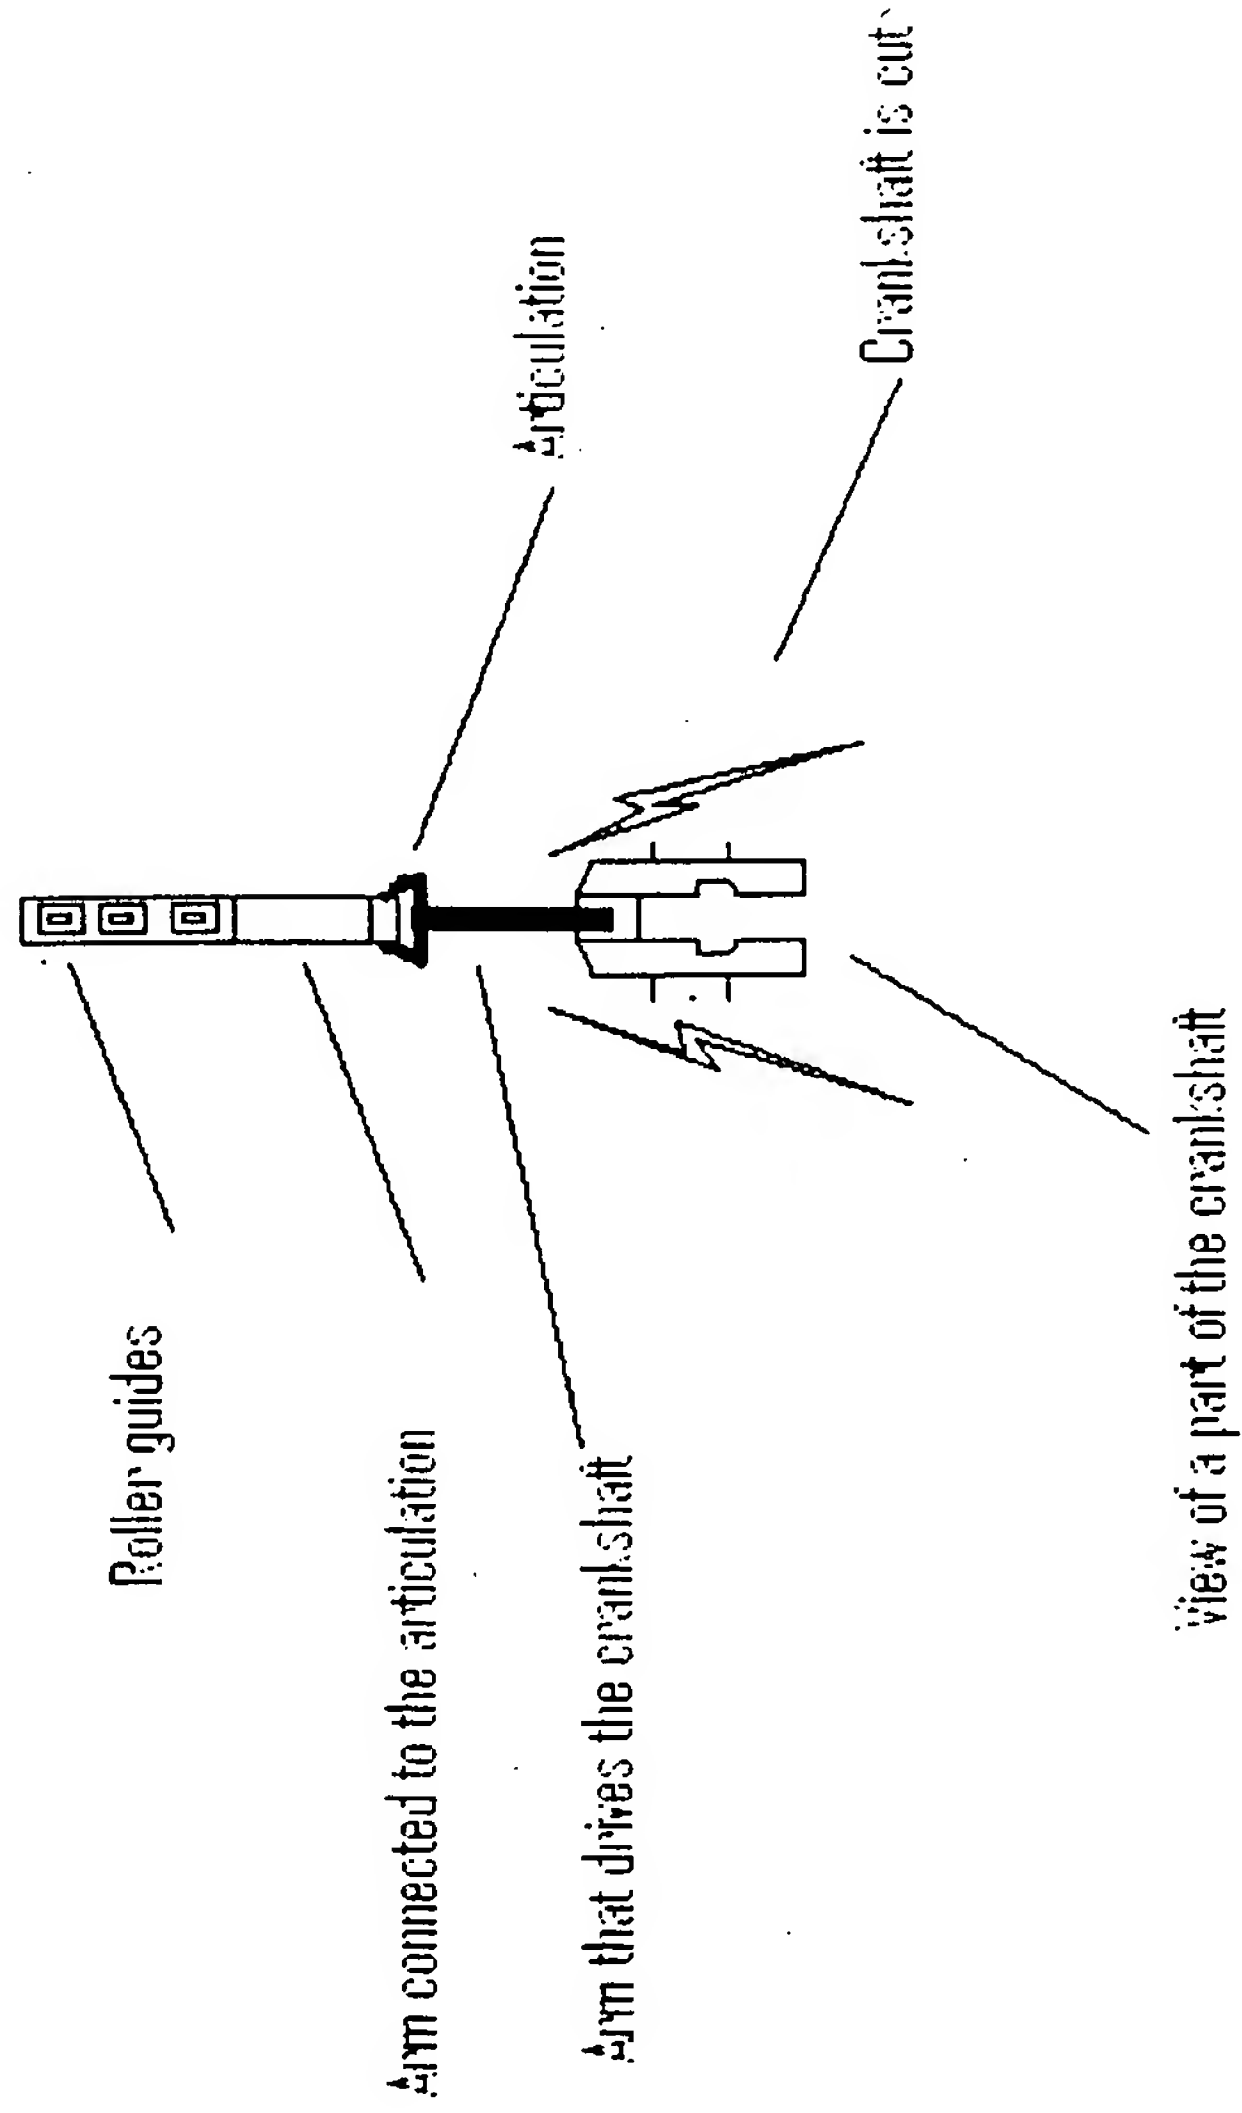

Scale:  
1 unit of this drawing =  
9.1429 in reality

Figure 5  
Application # 10/711662  
For USPTO by Alain Painchaud  
Member 109834 of OIO in Quebec

Roller guide




Moving part of the bridge

Scale:  
1 unit of this drawing =  
9.1429 in reality

Figure 6  
Application # 10/211682  
For UCPTD, by Alain Painchaud  
Member 109834 of OIO in Quebec



Back to back link (rectifier + inverter ) to  
cope for the frequency and power problem  
before sending to utility electrical system

Generator( Could be  
any power so I left it  
blank )



AC Bus at  
variable  
frequency

DC Bus



60 hz, 50 hz or whatever is needed

Here, there can be  
also a SVC, if  
needed

Electrical Diagram 1  
Application # 10/711662  
For: USPTO, By: Alain Painchaud  
Member 109834 of OIQ, Quebec


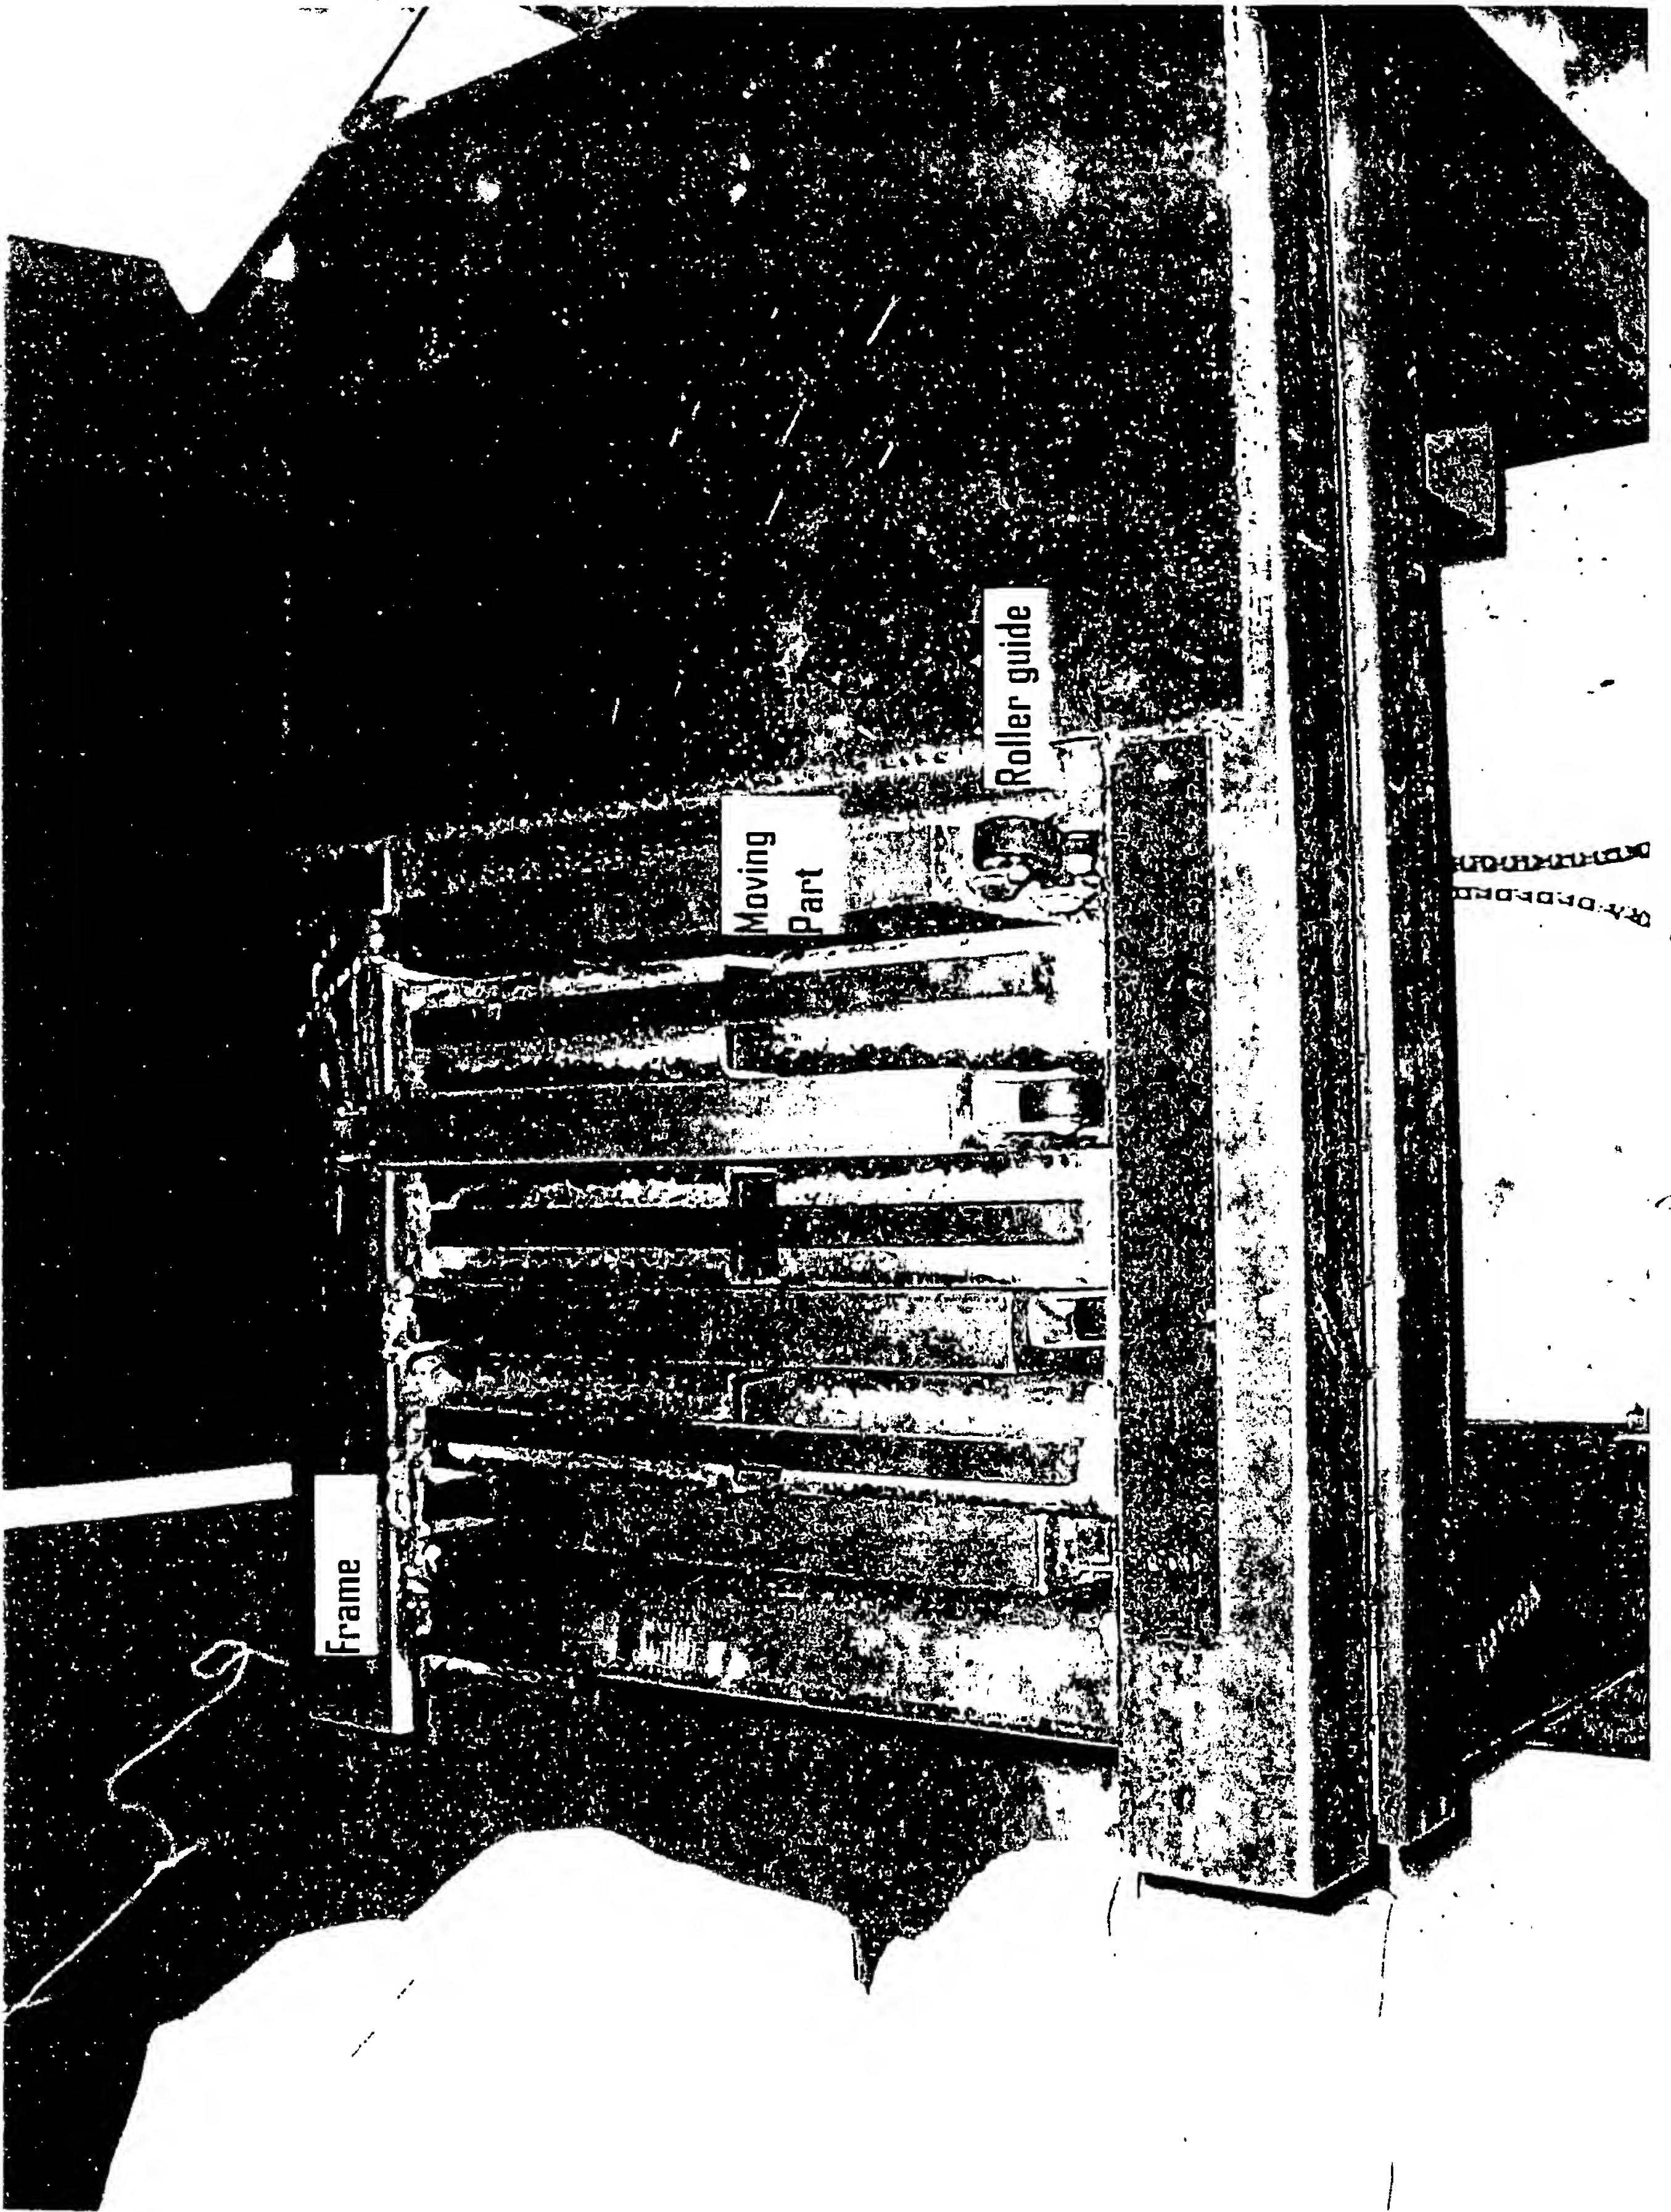


Figure of the top view of 31100-100000





Picture of generating part (apart from bridge)

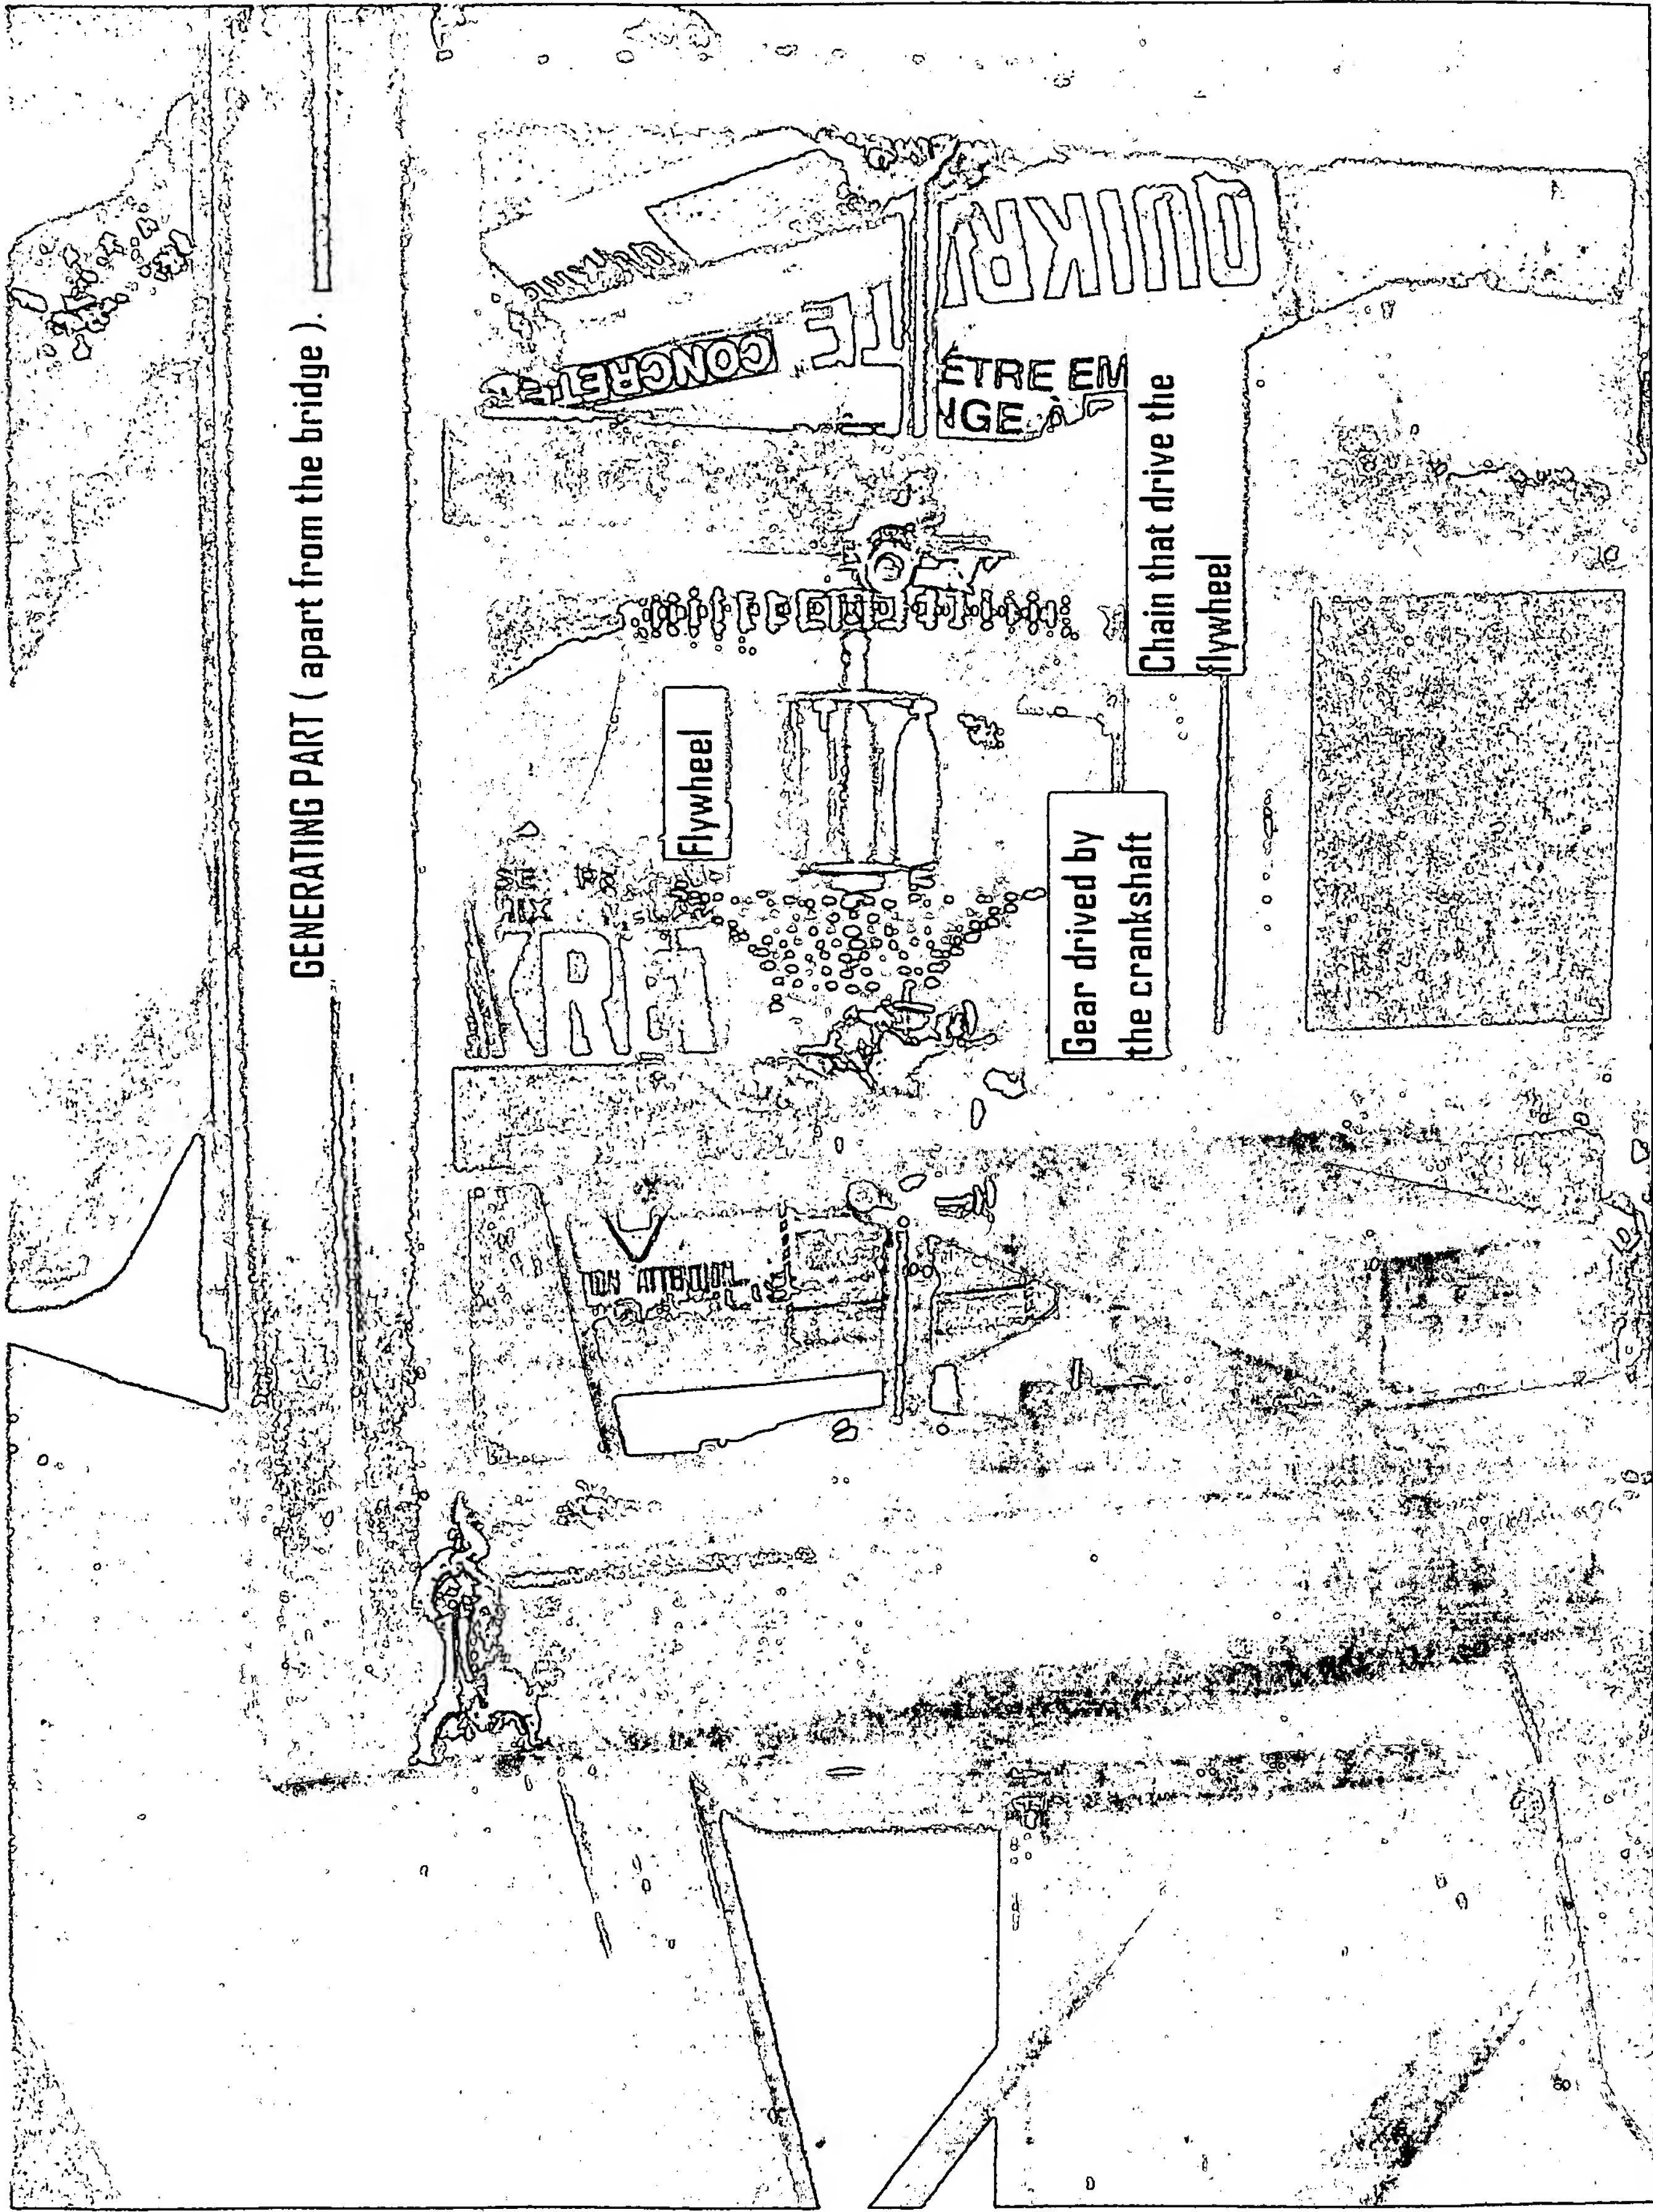


Picture of the side view of the  
prototype bridge

Bike gear that drive the  
generating part

Picture of the side view of the bridge prototype



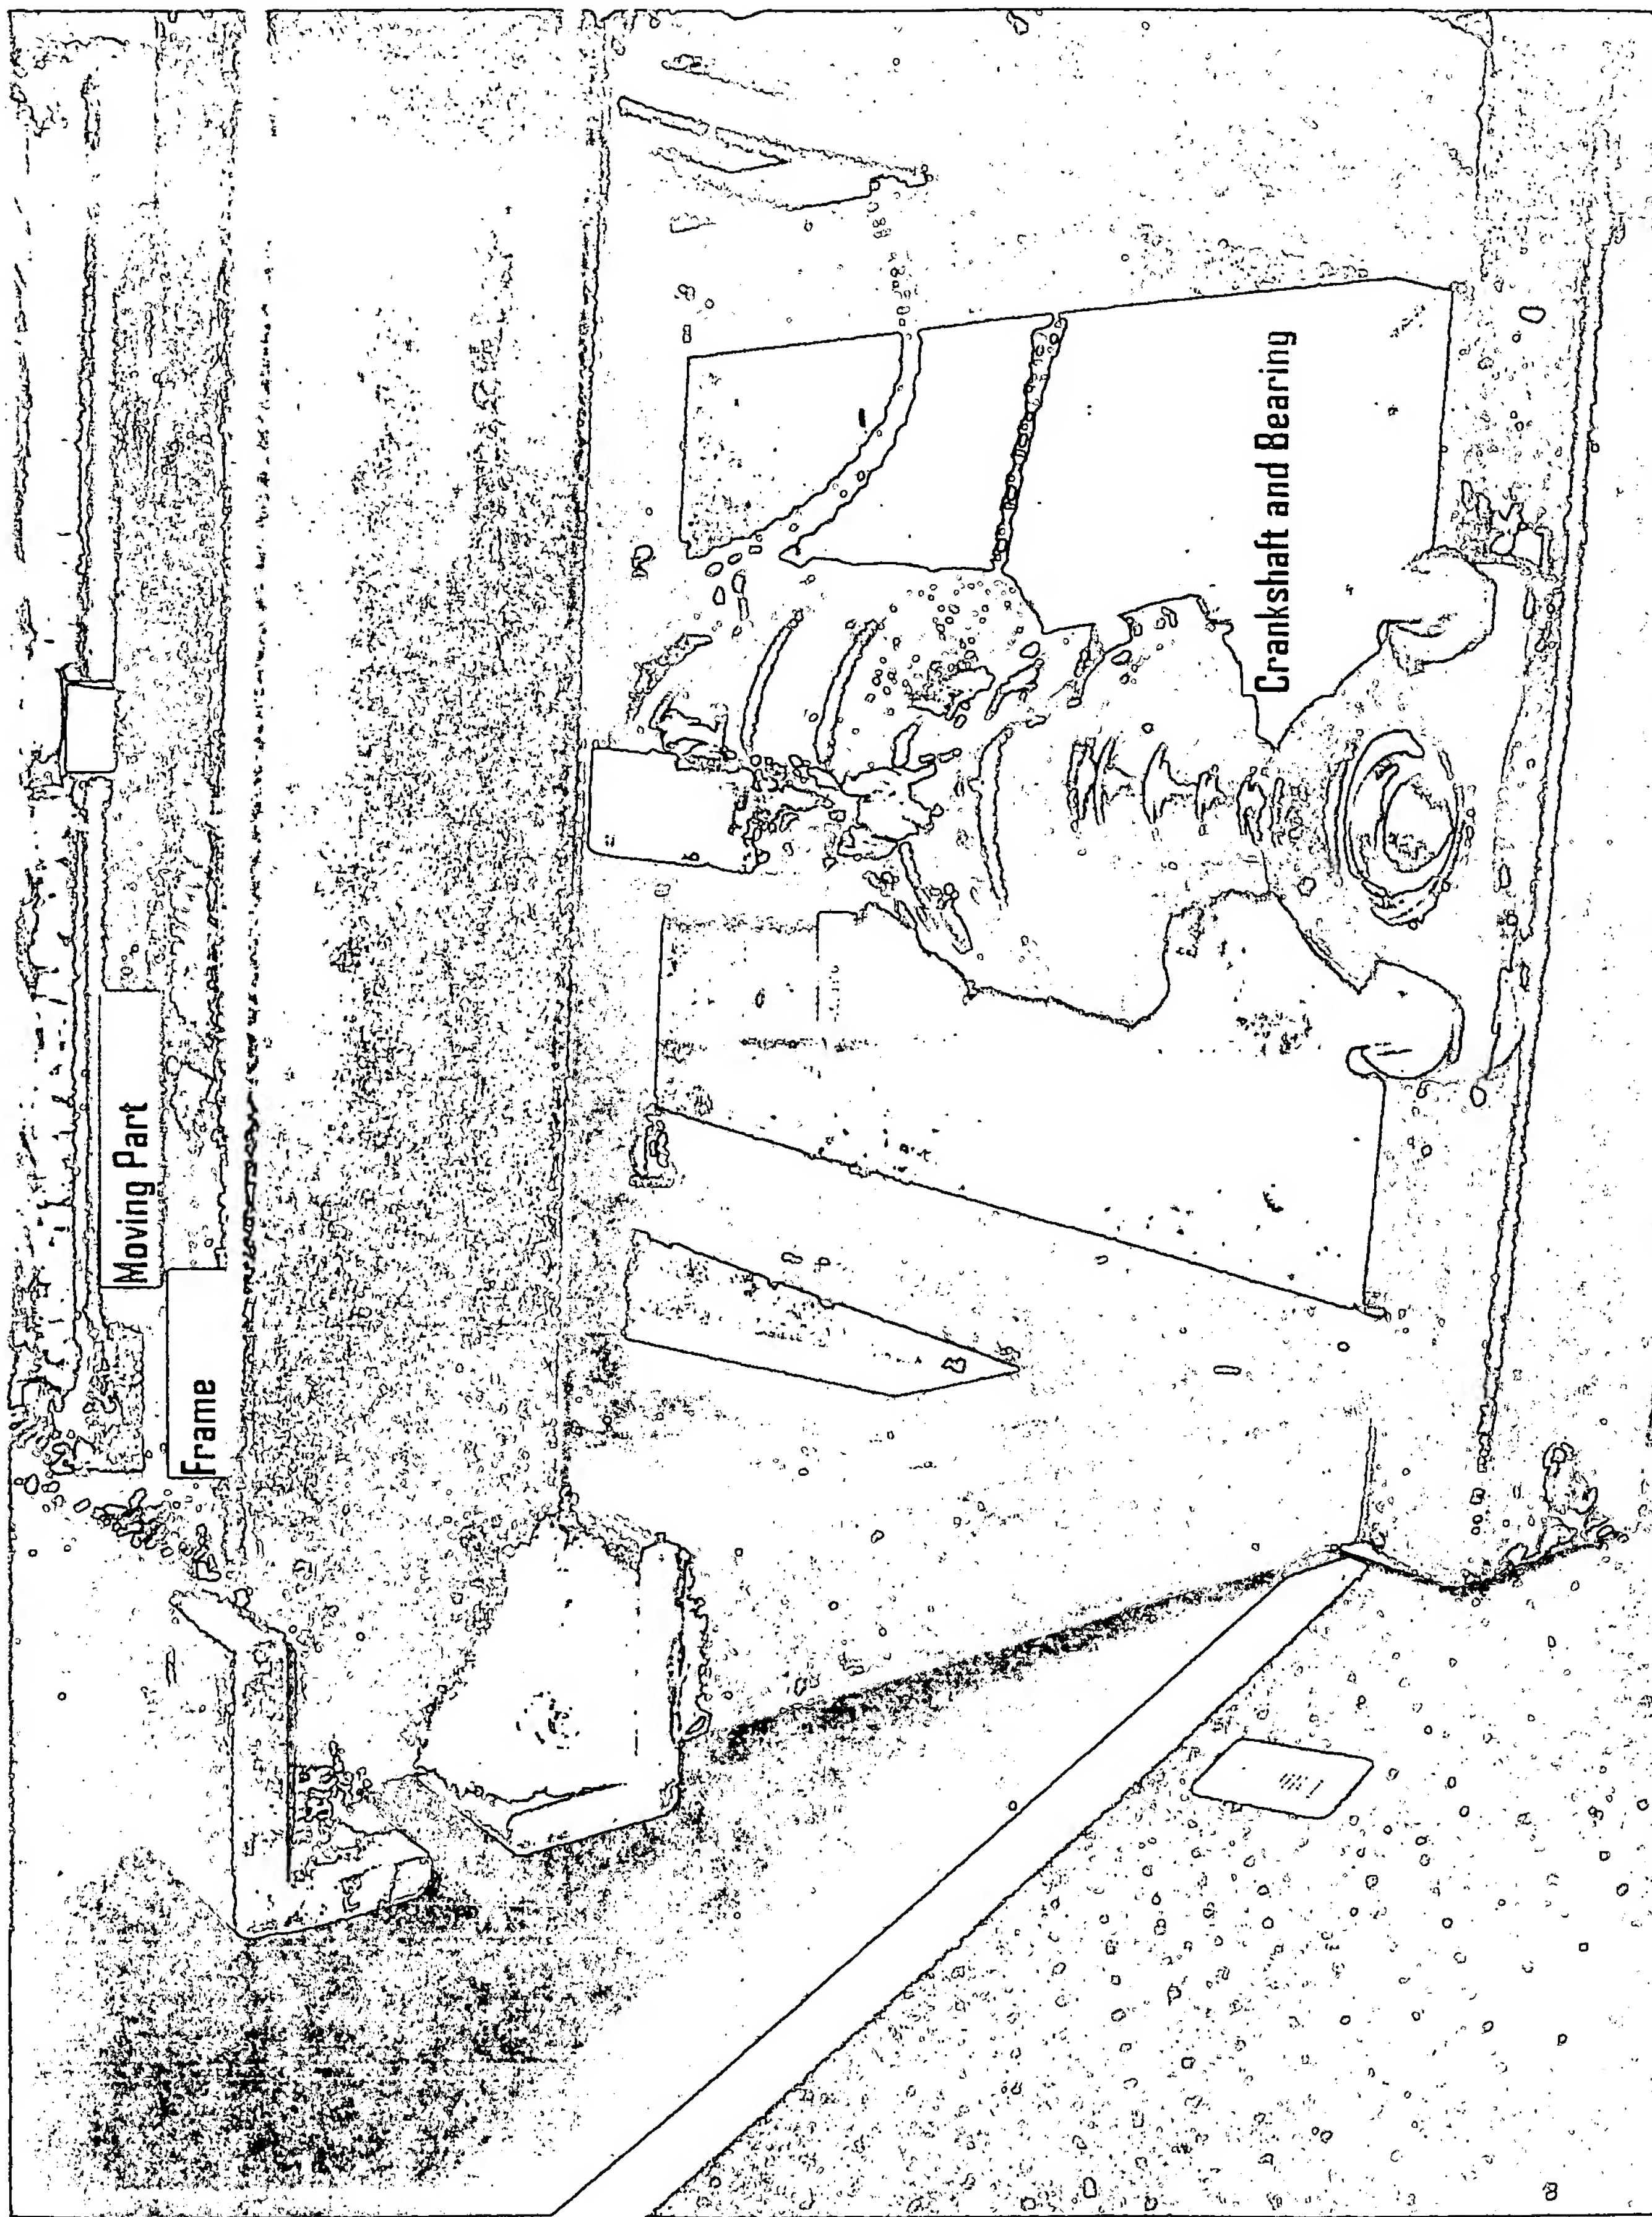

Picture of the First View of the Bridge

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**